



# LI SERIES

LINE-INTERACTIVE UPS 600VA - 3000VA

## Why come to us for a solution?

- Quality products
- Wide range of products
- Nationwide backup
- Locally produced UPS's
- Competitively priced
- Unique design
- Good value for money
- Preventative maintenance contracts

The LI Series provides reliable power protection and also provides clean power for your electronic equipment. The Buck & Boost AVR function corrects either under voltage or over voltage conditions without unnecessary battery drainage and extends the life of the battery. With a built-in powerful charger, the UPS can be fully charged back to 90% within 6-10 hours. The battery may be charged continuously even though it is in the OFF mode.




## APPLICATION

PC's, Workstations, Terminals, SOHO, Servers, Industry Equipment, Modems, desktop printers, PABX's, etc.

## FEATURES

- Microprocessor Controlled
- LED Display
- Built-in buck & boost AVR
- Powerful DC charger - 90% within 6-10 hours
- Battery recharge in "off" mode
- Cold start
- Wide input voltage range
- Self-testing on UPS start-up
- Smart Communication port
- Intelligent Monitoring Software

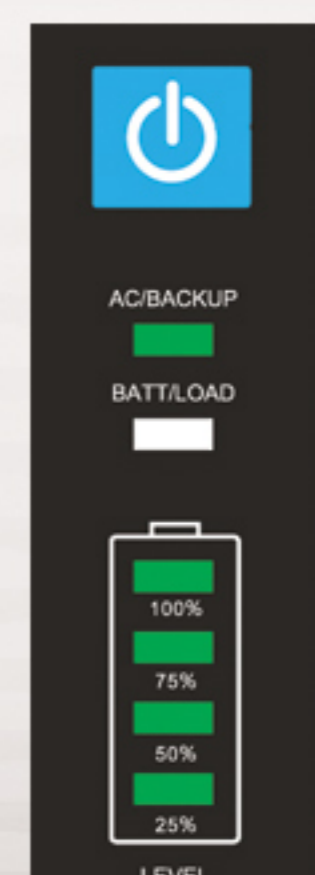



# LI SERIES

LINE-INTERACTIVE UPS 600VA - 3000VA

MODEL	LI060	LI120	LI200	LI300
<b>CAPACITY</b>	600VA	1200VA	2000VA	3000VA
<b>INPUT</b>				
<b>PHASE</b>	single phase			
<b>VOLTAGE RANGE</b>	230V ±20%			
<b>FREQUENCY</b>	50Hz			
<b>OUTPUT</b>				
<b>VOLTAGE</b>	230V ±10%			
<b>WAVEFORM</b>	AC mode: sine wave; battery mode: modified sine wave			
<b>FREQUENCY</b>	50Hz			
<b>TRANSFER TIME</b>	typical 2-6ms			
<b>PROTECTION</b>				
<b>SURGE PROTECTION</b>	metal oxide varistor			
<b>SHORT CIRCUIT</b>	fuse			
<b>COMMUNICATION</b>				
	USB			
<b>BATTERY</b>				
<b>TYPE</b>	sealed lead acid, maintenance free			
<b>RECHARGE</b>	after full discharge, 6-8 hours to 90% capacity			
<b>BACKUP TIME</b>	10-15min load dependent			
<b>CHARGE CURRENT</b>	350mA ~ 1A			
<b>BATTERY CONFIGURATION</b>	1x 12V/7AH	2x 12V/7AH	2x 12V/9AH	4x 12V/9AH
<b>INDICATION</b>				
<b>AC MODE</b>	green LED on			
<b>BATTERY MODE</b>	green LED flashes every 8 seconds			
<b>OTHER</b>				
<b>AUDIBLE NOISE AT 1M</b>	<40 dB			
<b>TEMPERATURE</b>	0~40°C			
<b>HUMIDITY</b>	95% (non-condensing)			
<b>NET/GROSS WEIGHT</b>	4.4 / 5 kg	7.8 / 8.6 kg	10.5 / 12.5 kg	23 / 24.1 kg
<b>UNIT DIMENSIONS (W-D-H) mm</b>	88 x 275 x 140	121 x 326 x 185		150 x 395 x 200
<b>PACKAGE DIMENSIONS (W-D-H)</b>	140 x 324 x 205	195 x 403 x 280		212 x 510 x 308

Notes: