



Dimensions (mm)

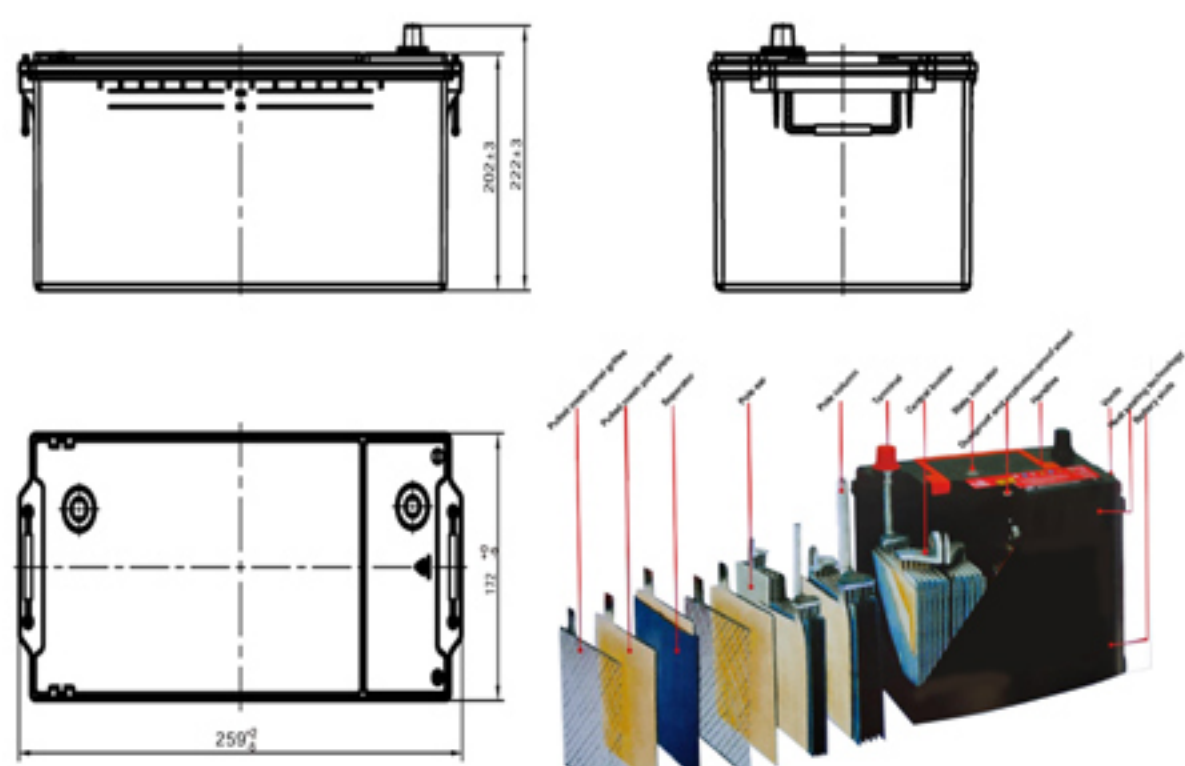


Electrical Specification

Rated Capacity	20 hour rate(5.0A)	57Ah
Reserve Capacity		
Cold Cranking Performance Amps@0°F(-18°C)		480A

Discharge Characteristics(25°C,70°F)

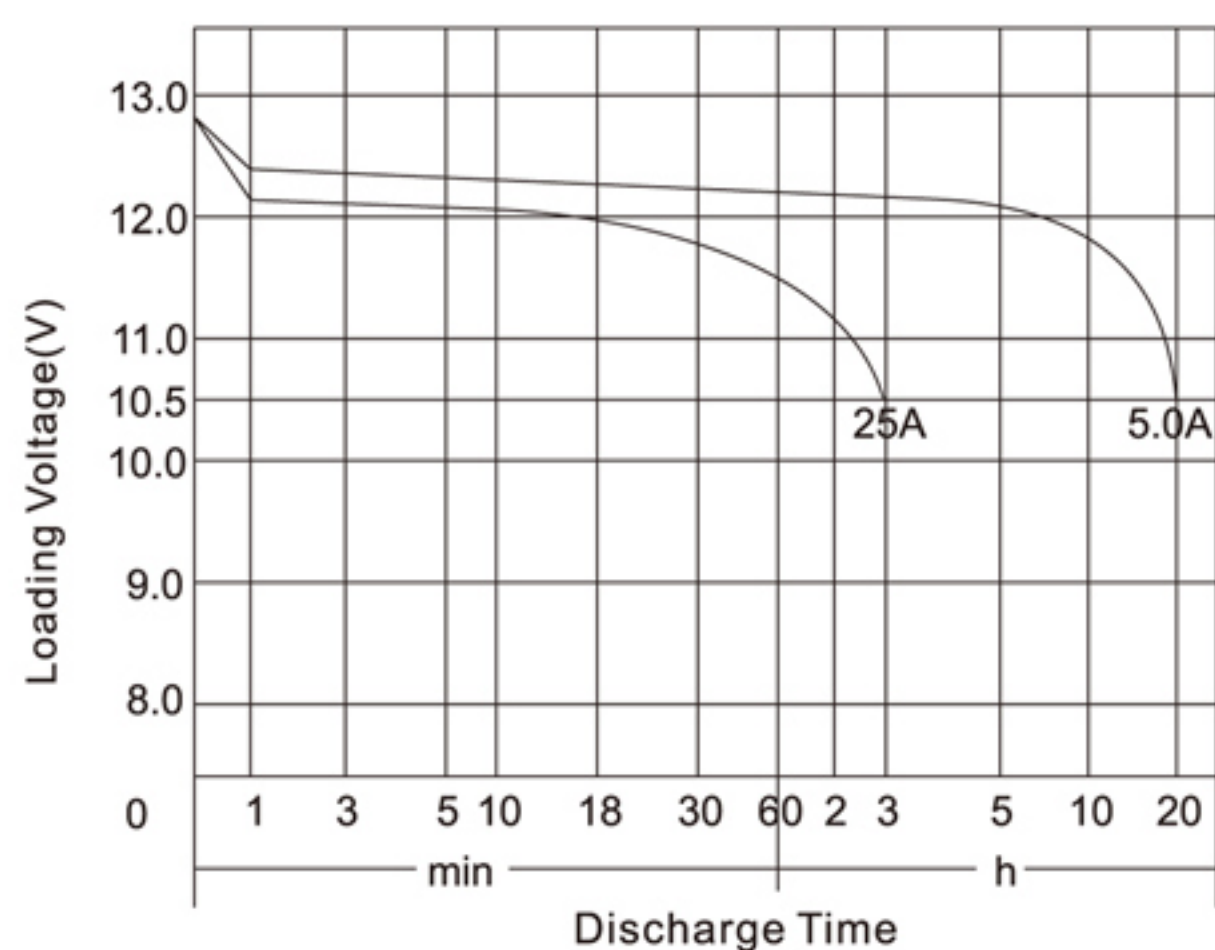

Discharge Characteristics(-18°C,0°F)

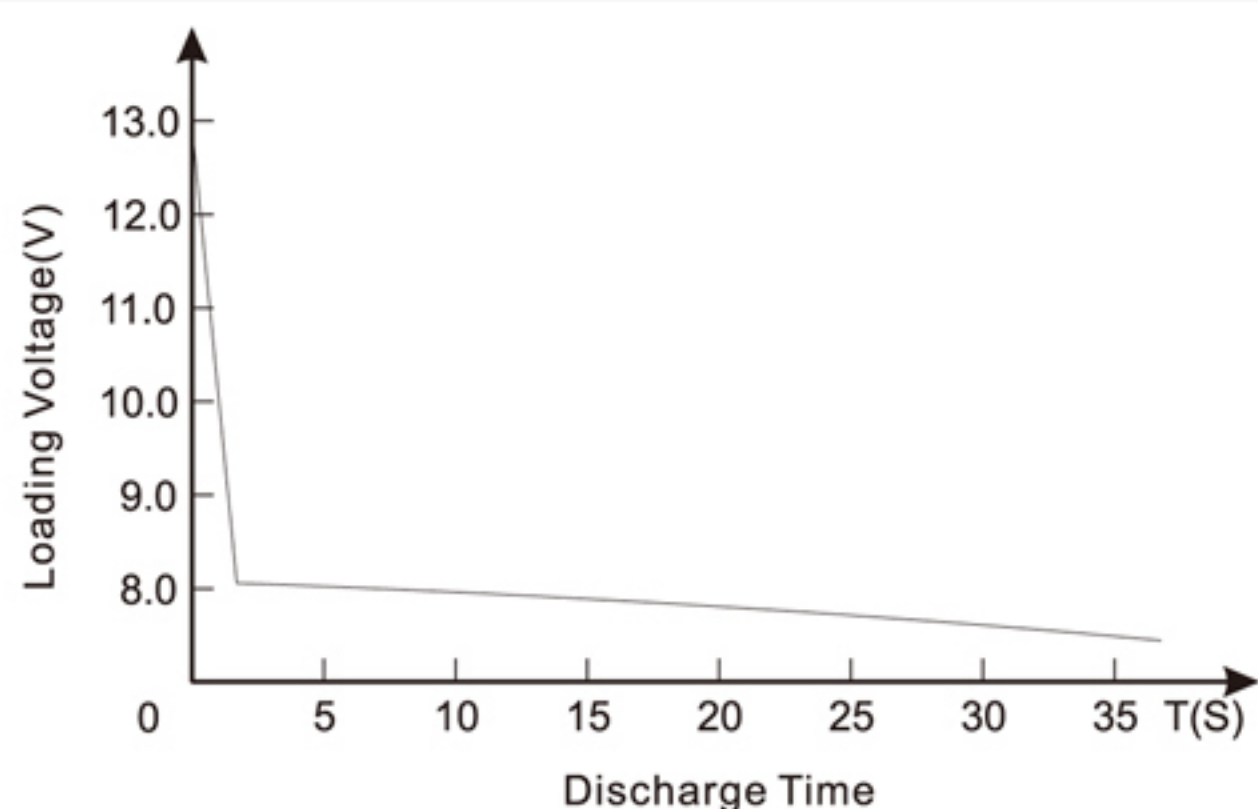


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		65Ah
Dimension	Length	259+2/-5mm(10.19inches)
	Width	172+2/-5mm(6.77inches)
	Container Height	202+3mm(7.95inches)
	Total Height(with Terminal)	222+3mm(8.74inches)
Weight		Approx 16Kg(35.3lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		3
Hold-Down		B0
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/

Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

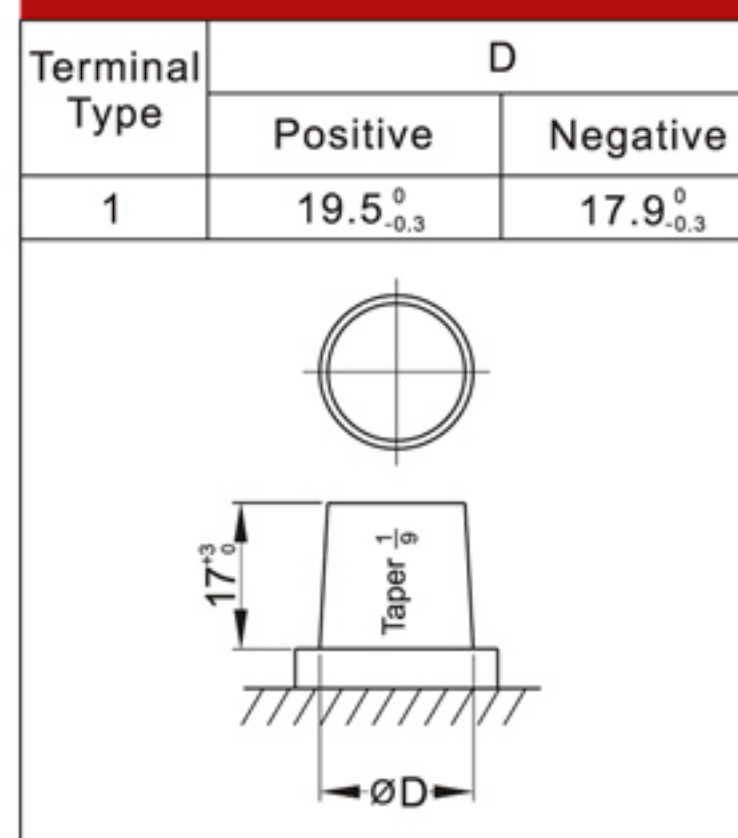

Cell Layout



Figure(3)