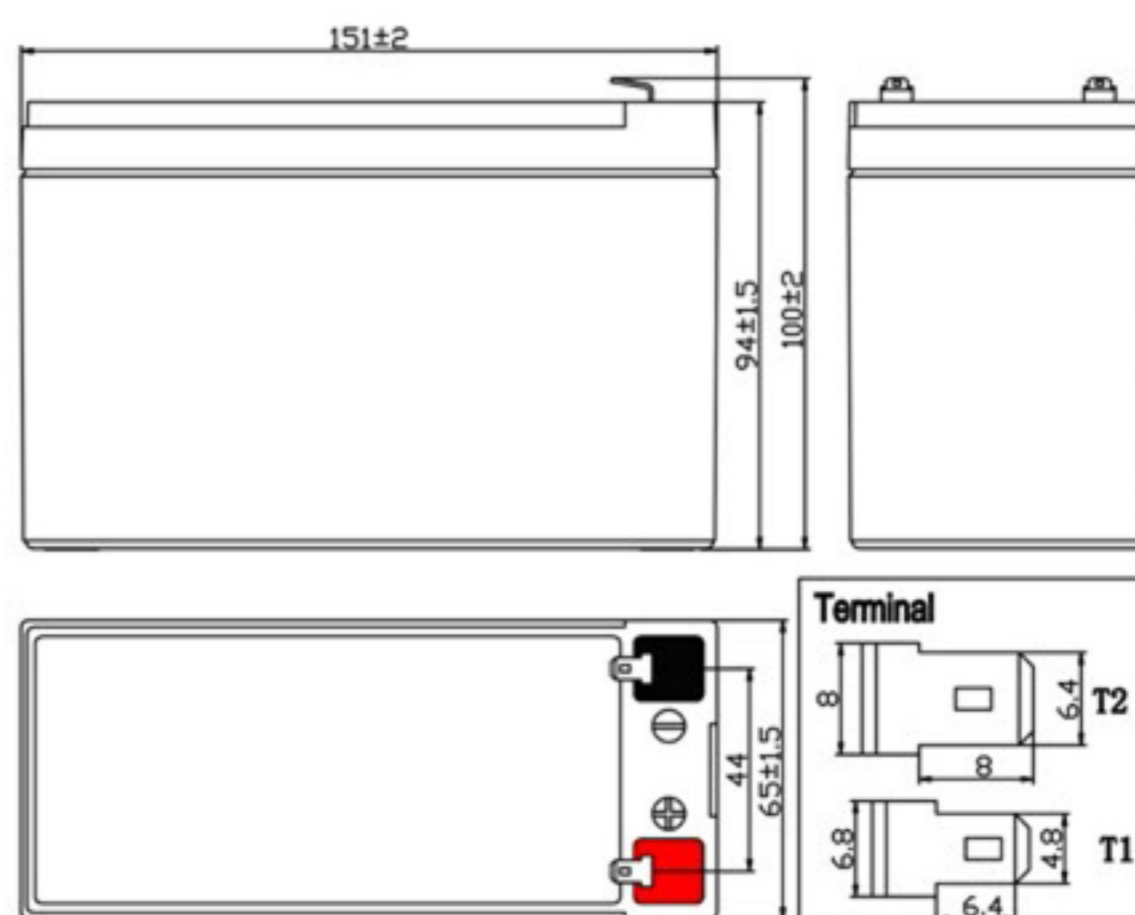


Specification

Nominal Voltage (V)	12V (6 cells in series)	
Rated Capacity	8.0Ah	(C ₂₀ , 1.75V/cell)
Dimensions(mm)	Length	151 ± 2 mm
	Width	65 ± 1.5 mm
	Height	94 ± 1.5 mm
	Total Height	100 ± 2 mm
Nominal Capacity @25°C (Ah)	20 Hour rate (0.404A to 10.5 volts)	8.08Ah
	10 Hour rate (0.772A to 10.5 volts)	7.72Ah
	5 Hour rate (1.380A to 10.5 volts)	6.90Ah
	1 Hour rate (5.200A to 9.6 volts)	5.20Ah
	15 min rate (15.40A to 9.6 volts)	3.85Ah
Approx. Weight	2.3 kg	
Terminal	T1/T2	
Max.Discharge Current	120A @25°C (5s)	
Internal Resistance	21mΩ @25°C (Full Charged Battery)	
Floating Design Life	6 years @25°C	
Ambient Temperature	Charge:	-20°C~50°C
	Discharge:	-40°C~60°C
	Storage:	-20°C~60°C
Container Material	A.B.S , UL94-HB , UL94-V0 , Optional	
Self Discharge	GEL battery can be stored for more than 6 months at 25°C. Self-Discharge ratio less than 3% per month at 25°C. Please charge batteries before using.	


Certification


Constant Current Discharge Characteristics (A), (25°C)

F.V/TIME	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	31.56	20.68	15.40	8.200	5.200	2.930	2.092	1.411	0.934	0.800	0.428
1.70V/cell	28.64	19.16	14.52	7.960	5.084	2.884	2.040	1.390	0.920	0.780	0.413
1.75V/cell	25.72	17.96	13.72	7.720	5.020	2.860	2.020	1.380	0.912	0.772	0.404
1.80V/cell	23.08	16.80	12.92	7.480	4.948	2.836	1.996	1.364	0.900	0.760	0.388


Constant Wattage Discharge Characteristics (Watt), (25°C)

F.V/TIME	5min	10min	15min	30min	60min	2H	3H	5H	8H	10H	20H
1.60V/cell	57.07	37.74	28.36	15.65	10.31	5.810	4.170	2.815	1.864	1.597	0.856
1.70V/cell	52.75	35.61	27.23	15.32	10.13	5.744	4.073	2.776	1.837	1.560	0.827
1.75V/cell	48.01	33.97	25.95	14.99	10.01	5.701	4.037	2.758	1.822	1.545	0.811
1.80V/cell	43.47	32.06	24.66	14.65	9.871	5.658	3.992	2.728	1.800	1.521	0.779


Charge Characteristics Curve

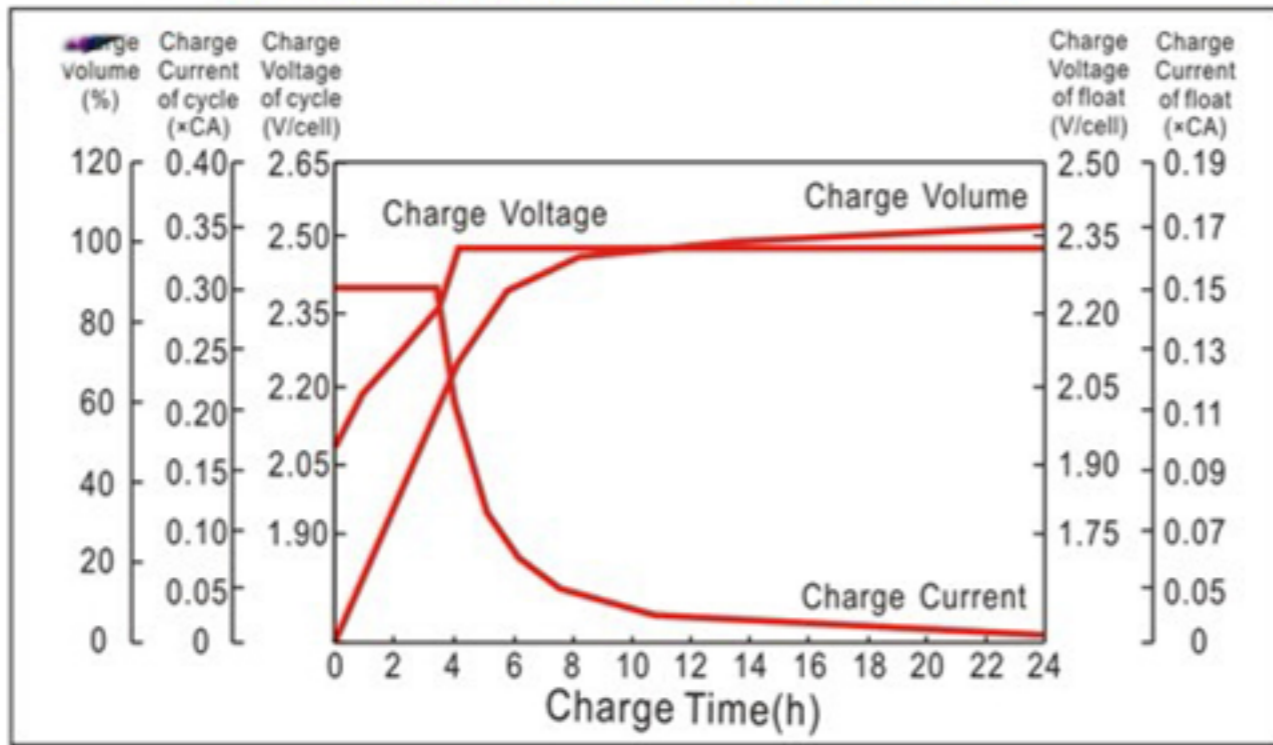


Discharge Characteristics Curve

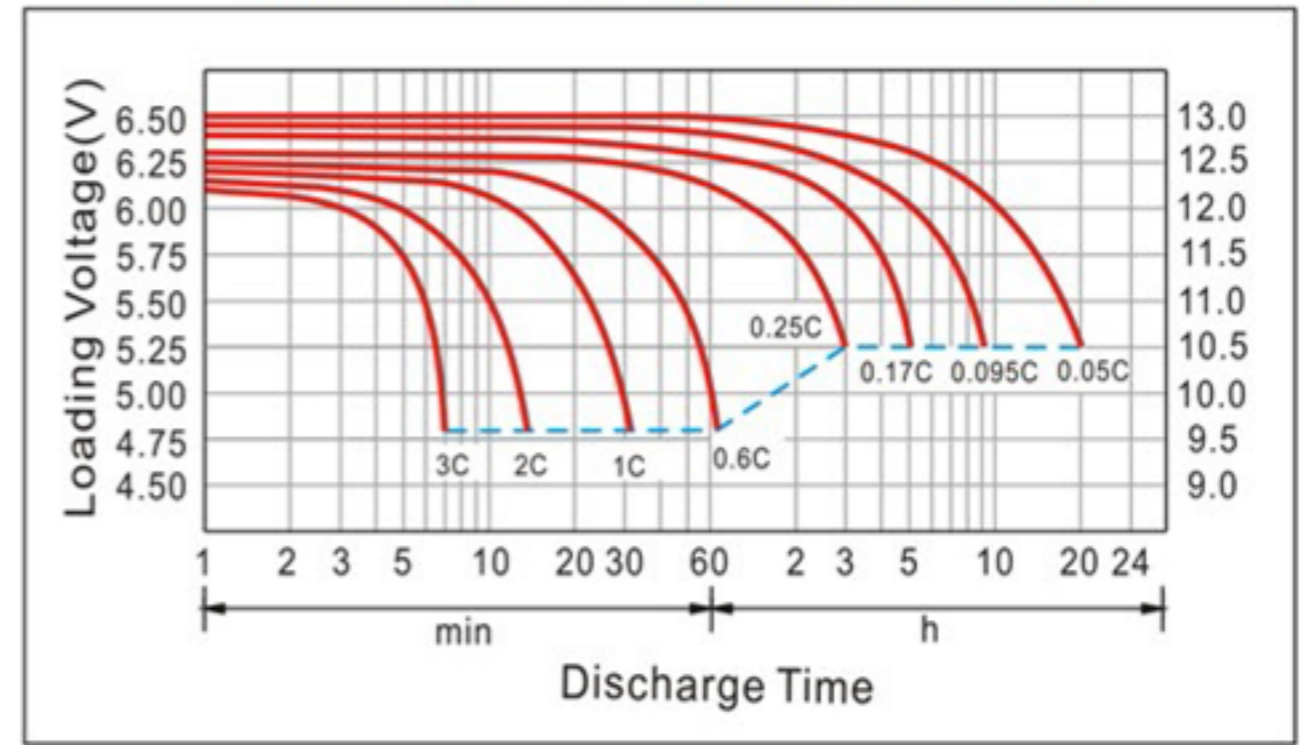

Cycle service life in relation to depth of discharge

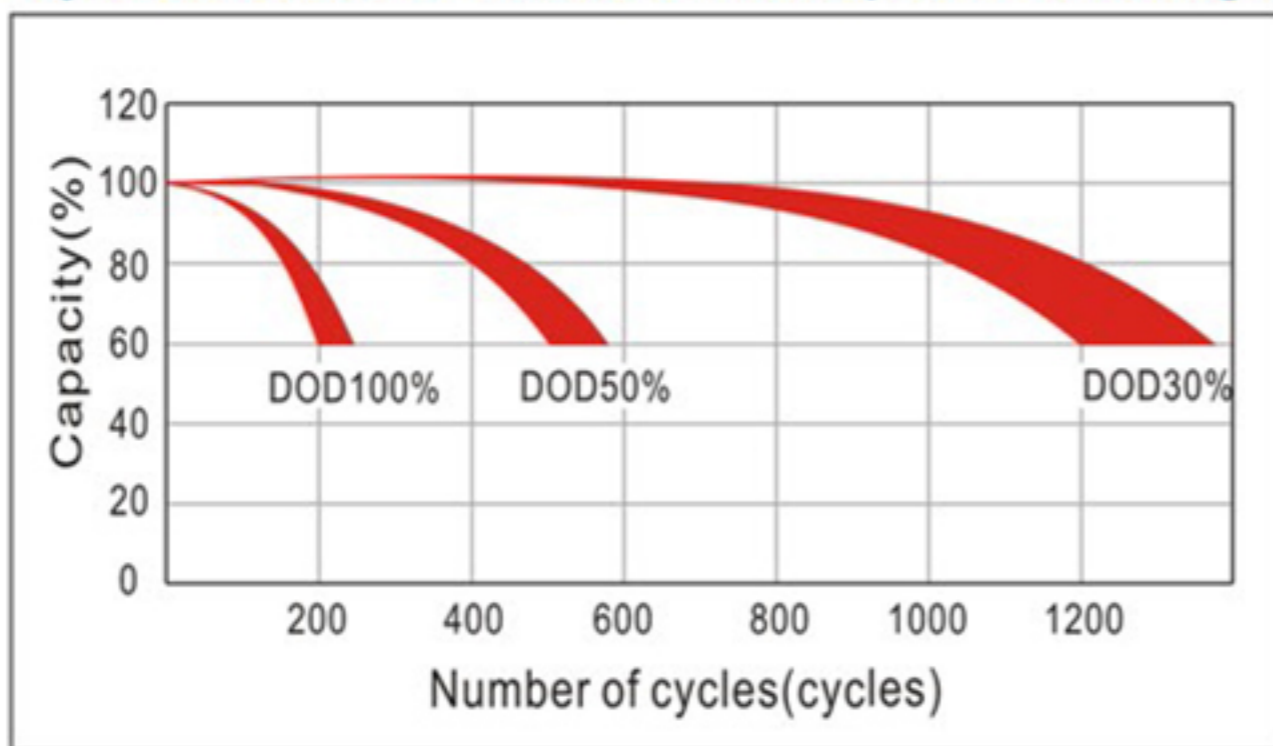

Capacity Storage Characteristics

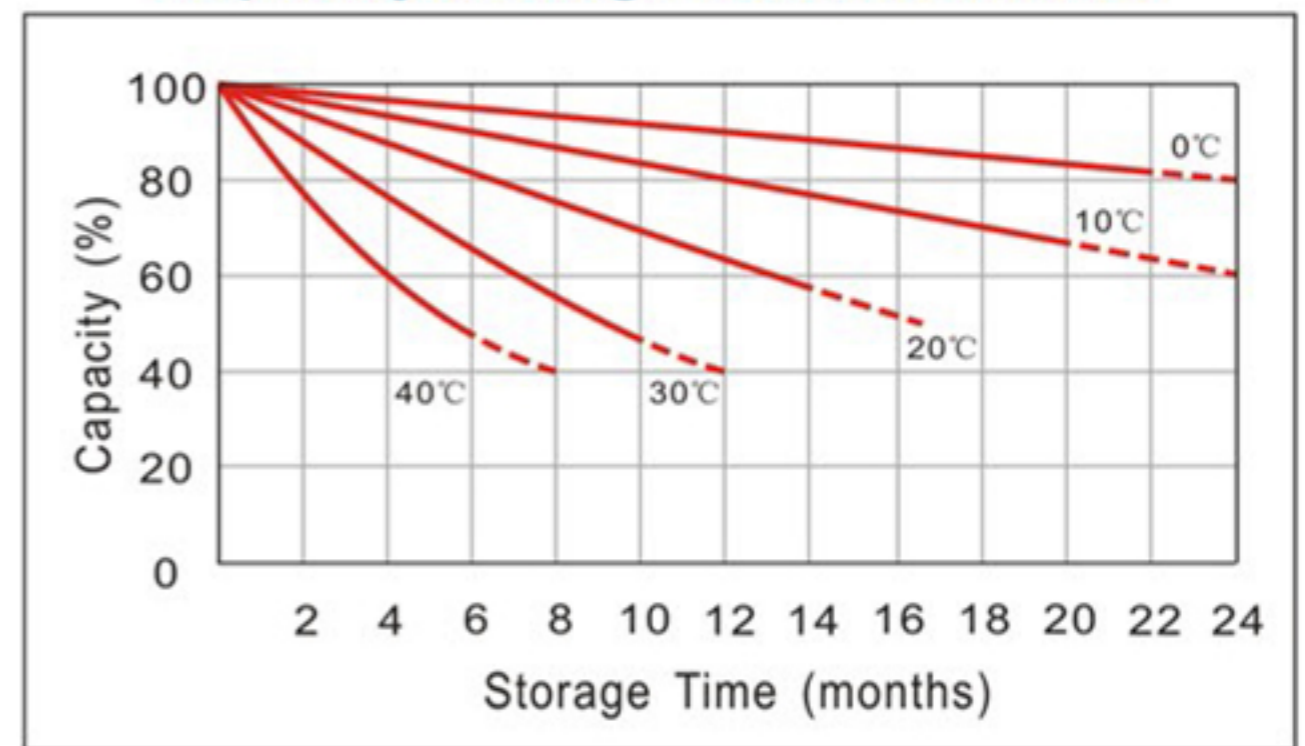

Capacity Factors with Different Temperature

Battery type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Maintenance & Cautions

Charging Procedure:

Application	Charging method	Charge voltage at 25°C	Temperature compensation coefficient of charging voltage	Max.charging current	Temperature
For standby power source	Constant voltage charging (With current restriction)	2.25~2.30 V/cell	-3mV/°C/cell	0.2CA	-20~50°C
For cycle service		2.45~2.50 V/cell	-4mV/°C/cell	0.3CA	

- Every month, recommend inspection every battery voltage.
- Every three months, recommend equalization charge for one time. **Equalization charge method:**
 Step 1: Discharge: 100% rate capacity discharge.
 Step 2: Charge: Max. Current 0.3CA, constant voltage 2.45~2.50V/Cell charge 24h.
- Length of service life will be directly affected by the number of discharge cycles, depth of discharge, Ambient temperature and charging voltage.
- Charge the batteries at least once every six months, if they are stored at 25°C. **Charging Method:**
 Constant Voltage : -0.2C × 2h + 2.4~2.45V/cell × 24h , Max. Current 0.25CA
 Constant Current : -0.2C × 2h + 0.1C × 12h
 Fast : -0.2C × 2h + 0.3C × 4h

Terminal of torque:

Bolt	M5	M6	M8
Terminal	T3, T10	T4, T7, T11, T12, T13	T5, T6, T8, T9, T14
Torque	6~7N.m	8~10N.m	10~12N.m